


# GZM3204HU



## HI-UV Printer



- ◆ Hi-speed and low cost UV solution.
- ◆ Suitable for a wide range of media.
- ◆ Long time outdoor durability.
- ◆ Low power consumption and low odor.
- ◆ Fast drying, ideal for immediate finishing.
- ◆ Smooth graphic and saturated colors.

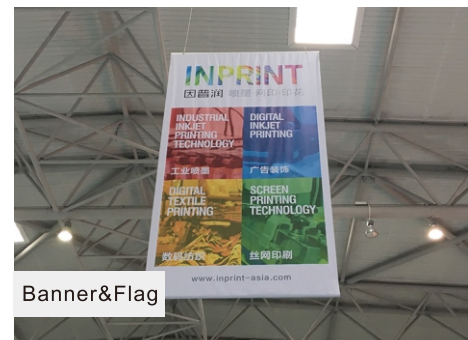

Banner&Flag



Bus wrap



Bill board




Bus Shelter

# GZM3204HU



## A wide range of applications solution!

With continuous ink recirculation and robust repairable construction, **Dimatix Starfire 1024** print head delivers unparalleled saturation and smooth gradient.



## Innovative HI-UV solution!

HI-UV is faster and cheaper than traditional UV and has less environmental concerns, better printing performance and longer outdoor durability than solvent.




## EnTek recirculation solution!

GZ Negative pressure recirculation system with pressure balancing unit, pressure protection unit and sub tank heater assures steady ink delivery, stable printing and minimum maintenance.




## Multipurpose feeding & taking up system!

Feeding system with four media holders is ideal for either two rolls of light media or one roll of heavy media. Air shaft assures precise and stable media taking up.



## Efficient UV curing system!

Platen UV lamp fixes the dots during printing to ensure sharp detail and smooth tone. Front UV lamp and extended heater dry the printing for quick finishing.



## Durable and precise body!

Reinforced CNC aluminum beam, dual linear guide and enhanced printing platen assure high speed, high resolution printing and prevents deforming during transportation.

ITEM	SPECIFICATION
Model	GZM3204HU
Print Head	4 Starfire 1024(10pl)
Ink	C.M.Y.K HI-UV Ink
Ink Supply System	EnTek Negative Pressure Recirculation System
Printing Width	Max. 3200mm
Media Type	Banner, Frontlit, Backlit, Vinyl, Film, Wall paper.....
Feeding System	Automatic media feeding and taking up system with pneumatic shaft
Drying System	Pre, mid, post and extended heater + LED UV curing lamps
Printing Speed	Draft 89m <sup>2</sup> /h Production 75m <sup>2</sup> /h Hi-resolution 39m <sup>2</sup> /h Photo 29m <sup>2</sup> /h
Data Interface	External: USB2.0; Internal: High-speed SCSI
Working Environment	Temp.23°C~29°C, Humidity:50%~80%
Software	Onyx+GZ control console
Power	50Hz/AC, 220V±10%, 13A
Installed Size	LxWxH(mm): 4800x1200x1550
G.W./N.W.	1335kgs/ 1035kgs

*Specifications are liable to change without prior notice. The printing speeds are measured in 3.2m width printing.*

## Gongzheng Group Co., Ltd.

Add: Miaobei Village, Yongjia County, Wenzhou City, Zhejiang Province, China 325102  
Tel: +86-577-67319778  
Fax: +86-577-67319775  
Email: gzsales@gongzheng.com  
Web: www.gongzheng.com



## Authorized distributor:

